



Congratulations on your purchase of the BOB Weather Shield. It is designed to provide your child with protection from inclement weather. Proper installation and care will provide years of reliable service.

Before attempting to use or attach your new Weather Shield, read and understand these instructions completely to insure proper assembly and operation. If you are unclear on any point, contact your dealer or BOB before use.

▲ WARNINGS ▲

- This product is designed exclusively for use with BOB Revolution Duallie strollers. It is not intended for use with other strollers or products.
- **The Weather Shield is made of a non-breathable material. To avoid danger of suffocation and excessive temperatures, follow all assembly instructions.**
- Always make sure all vents are unobstructed, as indicated in Fig.1.
- The Weather Shield is not designed to work with optional Infant Car Seat Adapter and car seat.
- Do not use Weather Shield when temperatures exceed 65°F/18°C. Use in higher temperatures can cause unsafe conditions inside the Weather Shield.
- Never leave child unattended.
- When not in use, keep out of reach of children.



Fig. 1 Keep all Vents unobstructed.



Fig. 2 Canopy Supports in position.

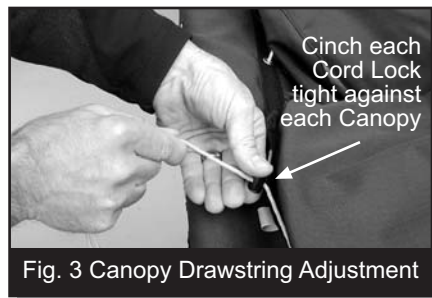


Fig. 3 Canopy Drawstring Adjustment

INSTALLATION INSTRUCTIONS:

1. Set stroller Parking Brake (refer to Parking Brake section of stroller Owner's Manual). Place each sun canopy into position to receive the Weather Shield as shown in Fig.2.

2. Pull each canopy drawstring in order to gather extra material under canopy. Cinch cord lock against canopy to retract and hold material, as shown in Fig. 3.

Very important: when the Weather Shield is used, the rear canopy flap must be in correct position as described below. This will insure proper airflow and avoid danger of suffocation.

3. Locate rear canopy flap and fold forward. Attach canopy flap velcro on flap to respective velcro mate on top outboard side of each canopy as shown in Fig. 4). Warning tag on rear canopy flap also describes and illustrates this critical step.

4. Inspect opening at back of stroller to make sure the air passages between top of seat back and canopy are unobstructed (see Fig. 5). We recommend reclining each seat back slightly to optimize airflow (refer to Reclining Seat section of stroller Owner's Manual).

5. Place Weather Shield on the stroller so the rear flap drapes over back (between the handlebars) and the seam above the window is aligned with the forward Sun Canopy supports (see Fig. 6).

6. Stretch the elastic cord on each side under each respective black shock knob as shown in Fig. 7. There is an opening mid way up each side (with silver



Fig. 4 Rear Canopy Flap in position.



Fig. 5 Rear Vents unobstructed.



Fig. 6 Shield placed on Canopy

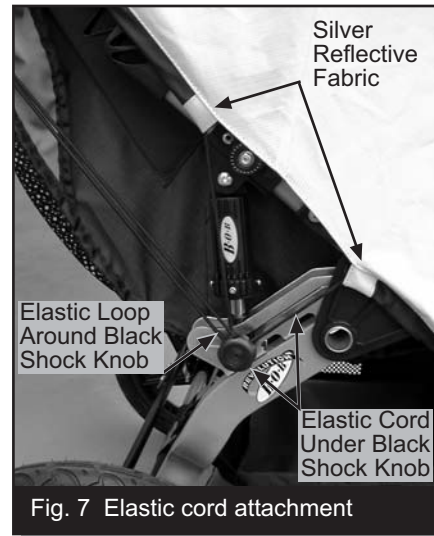


Fig. 7 Elastic cord attachment



REVOLUTION DUALLIE WEATHER SHIELD INSTRUCTIONS MA0653

(800) 893-2447 www.bobgear.com email- info@bobgear.com Ph: (208) 375-5171
Fax: (208) 375-5172, BOB Trailers, Inc. 5475 Gage St. Boise, ID 83706

reflective fabric on each end) where the elastic cord is exposed.

7. Attach each looped end of the elastic cords (protruding out sides of back flap) around each black shock knob on respective side of stroller, as shown in Fig. 7 (right side shown). The cord locks allow the loop to be enlarged or reduced, thereby adjusting the tension.

8. Stretch and hook the front elastic edge of the Weather Shield evenly under the lip of the plastic nose on the stroller. Keep edge above red swivel lockout knob (see Swivel Lockout section of Owner's Manual). Position front air vent in center over nose of the stroller (Fig. 8).

9. Stretch each elastic edge of the Weather Shield and route under each respective side of frame tube as shown in Fig. 8.

10. Align vents on rear flap of Weather Shield with air passages between top of seat back and canopy flap. Make sure air opening is not obstructed (Fig. 9).

11. To place passenger(s) in the stroller, pull the front of the Weather Shield off the nose of stroller, then lift up, stretch and roll over the forward edge of stroller canopy as shown in Fig. 10. This will temporarily hold the Weather Shield out of your way while you place each child into the seat(s).

12. Once your child is secured in the safety harness (refer to your stroller Owner's Manual, Seat Safety Harness section), release the Weather Shield from canopy and re-secure under the lip on the stroller nose and under frame sides. Fig. 8 shows a Revolution Duallie Weather Shield



Fig. 8 Weather Shield correctly installed on Revolution Duallie



Fig. 9 Proper rear vent alignment.



Fig. 10 Weather Shield shown placed over Forward Canopy Supports for loading & unloading

correctly installed.

CARE INSTRUCTIONS:

Hand wash cold and hang dry. Do not dry clean, iron, or place in dryer.

LIMITED WARRANTY:

BOB Trailers Inc. takes pride in its workmanship and strives to manufacture the best products possible. Therefore, we warranty the Revolution Duallie Weather Shield against defects in material and workmanship subject to the conditions listed below. Since no product is indestructible, it does not cover defects attributable to or resulting from normal wear, abuse or alteration.

- The Revolution Duallie Weather Shield is warranted for one year from the date of original purchase.
- Warranty is only valid for the original purchaser.
- Proof of purchase is required to exercise this warranty.
- Labor and freight charges are not included.
- Normal wear, neglect, abuse, accidents, improper use are not covered by this warranty.
- Warranty claims must be made through an authorized dealer.
- This warranty is limited to the repair or replacement of the defective part. BOB shall in no event be responsible for consequential or special damages.
- This limited warranty is the only express or implied warranty applicable to BOB. Any implied warranties, including warranties of merchantability and fitness shall be limited in scope and duration in accordance with this limited warranty.